

# Akulon® F136-C

## PA6

Film Extrusion, Very High Viscosity, Lubricated, Food Contact Quality

Print Date: 2018-12-13

Properties	Typical Data	Unit	Test Method
<b>Thermal properties</b>			
	dry / cond		
Coeff. of linear therm. expansion (parallel)	0.9 / *	E-4/°C	ISO 11359-1/-2
Spec. heat capacity	1550	J/(kg K)	-
Average spec. heat capacity 20-150 °C	2250	J/(kg K)	
<b>Material specific properties</b>			
	dry / cond		
Viscosity number	245 / *	cm <sup>3</sup> /g	ISO 307, 1157, 1628
RSV formic acid, 1g/100ml	3.6	-	DSM method
Melt Viscosity (260 °C)	2250	Pa s	DSM method, 260 °C
Density	1130 / -	kg/m <sup>3</sup>	ISO 1183
<b>Other Properties (Film)</b>			
	Value		
Transparency/Clarity	83	%	DSM method
Oxygen transmission rate at 23°C/0%r.h.	27	cm <sup>3</sup> /(m <sup>2</sup> *d*bar)	DIS 15105-1/-2
Oxygen transmission rate at 23°C/85%r.h.	39	cm <sup>3</sup> /(m <sup>2</sup> *d*bar)	DIS 15105-1/-2
Water Vapor Transmission Rate at 23°C/85%r.h.	35	g/(m <sup>2</sup> *d)	DIS 15106-1/-3
<b>Mechanical properties (Film)</b>			
	dry / cond		
Modulus of elasticity	450 / -	MPa	DSM-Method, 50 mm/min
Stress at yield, parallel	31	MPa	ISO 527-3
Maximum stress, parallel	83	MPa	ISO 527-3
Maximum strain, parallel	350	%	ISO 527-3
Trouser Tear resistance, parallel	32	-	ISO 6383-1
Puncture resistance	1400 / -	J/m	DSM-Method

Akulon®, Arnite®, Arnitel®, EcoPaXX®, ForTii®, Novamid®, Stanyl® and Xytron™ are trademarks of DSM.

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of the aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Typical values are indicative only and are not to be construed as being binding specifications. This document replaces all previous versions relating to this subject.

Copyright © DSM 2018. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM.


Properties	Typical Data	Unit	Test Method
Static coefficient of friction	1.2 / -	-	ISO 8295
Dynamic coefficient of friction	1	-	ISO 8295

## Test specimen production (Film)

### Value

Type of extrusion	cast	-	-
Thickness of specimen	0.05	mm	-
Extruder temperature	270	°C	
Die temperature	270	°C	
Chill Roll Temperature	110	°C	

## Viscosity-shear rate

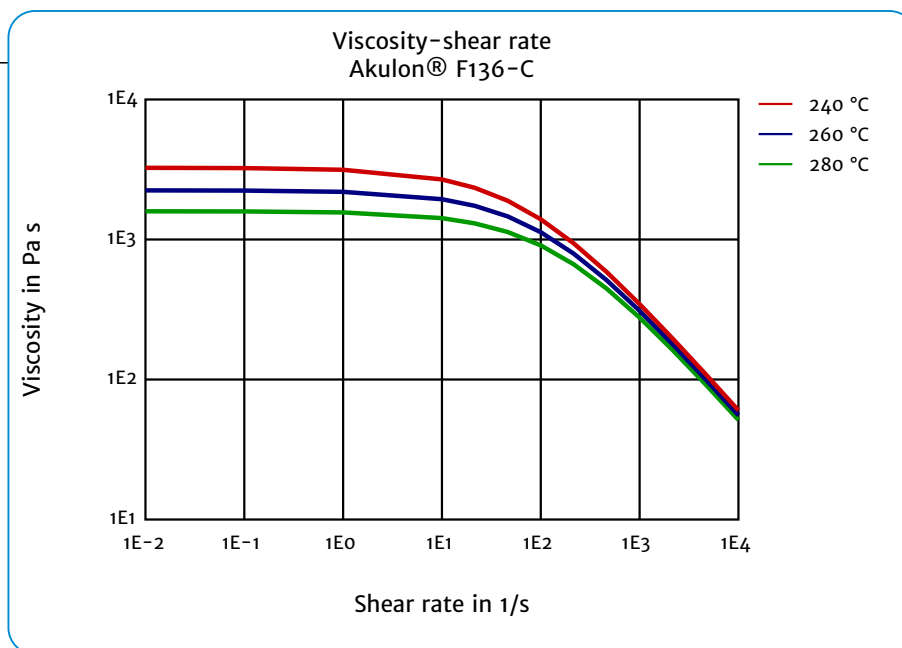

Akulon<sup>®</sup>, Arnite<sup>®</sup>, Arnitel<sup>®</sup>, EcoPaXX<sup>®</sup>, ForTii<sup>®</sup>, Novamid<sup>®</sup>, Stanyl<sup>®</sup> and Xytron<sup>™</sup> are trademarks of DSM.

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of the aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Typical values are indicative only and are not to be construed as being binding specifications. This document replaces all previous versions relating to this subject.

Copyright © DSM 2018. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM.